

ON THE PROVIDED SD CARD YOU WILL FIND COPIES OF THE MANUALS AND DISCLAIMER!

QUICK INSTALLATION GUIDE:

BEWARE! Cable management is the most critical part of the installation to ensure a neat and professional setup. Take care to arrange them so they do not pose a risk while driving!


The steps for the basic installation are the following:

1. Decide where you want to have the StartDiag Display unit setup (beware to not obstruct excessively your view of the road!).
2. Setup the provided windshield support using the alcohol pad provided to clean the portion of the glass where the support will be installed, this is very important for the robustness of the mounting.
3. Connect the microUSB cable to the Display unit and install it on the windshield support.
4. Decide where you want the Controller module to be mounted and install it securely.
5. Connect the other end of the microUSB cable to the Controller unit.
6. Connect the DB15 cable to the Controller unit.
7. Plug the OBD connector into the vehicle's OBD-II port.

Installation is now completed.

NOTE: When the OBD connector is plugged in the vehicle, a red led will flash briefly on the Display unit, confirming that power is present.

The screen of the Display unit will stay black until you touch it (same behavior as when the unit is in standby mode).

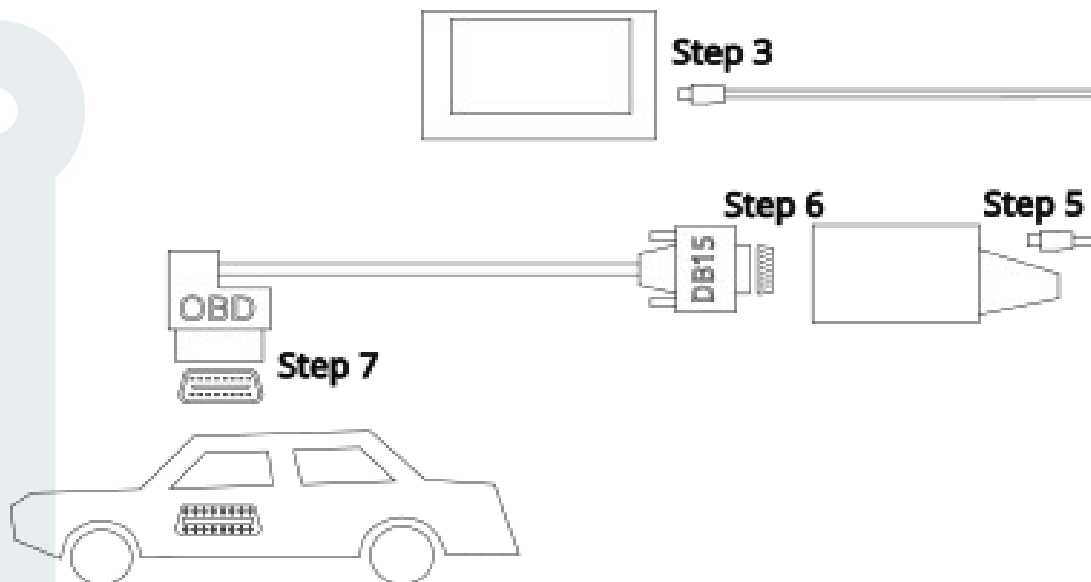

StartDiag User Guide:

www.tomelectronics.it/downloadfiles/StartDiagUserGuide.pdf

